


DELUXE FLAG ARRANGEMENTS


Constructed of 1/8" stainless steel aircraft cable with a stainless steel thimble attached at each end with 2 copper crimps. These flag arrangements provide the method of attaching the flag or flags to the cable assembly. This is also an excellent method for changing the quantity of flags or the size(s) of flag(s) without having to change the entire cable assembly. Standard arrangements are supplied with either 2 or 3 stainless steel quick links depending on the recommended flag size. Deluxe arrangements are supplied with flag snaps, shock spring where needed and safety cable where needed.



MODEL	ITEM #	FOR FLAG SIZE	SUPPLIED WITH				1-5	6+	LBS.
			QUICK LINKS	FLAG SNAPS	SHOCK SPRING	SAFETY CABLE			
FA2	360474	2' x 3'	2	2 (STAINLESS STEEL SSFS-1)	—	—	\$60	\$56	1.2
FA25	360475	2-1/2' x 4'	2	2 (STAINLESS STEEL SSFS-1)	—	—	67	59	1.3
FA3	360476	3' x 5'	2	2 (STAINLESS STEEL SSFS-1)	—	—	68	60	1.3
FA4	360477	4' x 6'	2	2 (STAINLESS STEEL SSFS-1)	—	—	71	64	1.3
FA5	360478	5' x 8' or 5' x 9-1/2'	2	2 (STAINLESS STEEL SSFS-1)	—	—	75	68	1.4
FA6	360479	6' x 10'	2	2 (STAINLESS STEEL SSFS-1)	—	—	82	75	1.4
FA8	360480	8' x 12'	3	2 (STAINLESS STEEL SSFS-2)	1	1	117	105	2.3
FA10	360481	10' x 15' or 10' x 19'	3	2 (STAINLESS STEEL SSFS-2)	1	1	119	108	2.6
FA12	360482	12' x 18'	3	2 (STAINLESS STEEL SSFS-2)	1	1	127	115	2.6
FA15	360483	15' x 25'	3	2 (STAINLESS STEEL SSFS-2)	1	1	132	119	2.7
FA20	360484	20' x 30' or 20' x 38'	3	2 (STAINLESS STEEL SSFS-2)	1	1	138	124	2.9
FA25	360485	25' x 40'	3	2 (STAINLESS STEEL SSFS-2)	1	1	141	127	3.6
FA30	360486	30' x 50' or 30' x 60'	3	2 (STAINLESS STEEL SSFS-2)	1	1	145	129	4.4

CABLE ASSEMBLIES

Constructed of 1/8" and/or 3/16" stainless steel aircraft cable incorporating a stainless steel swivel to minimize the effect of unraveling due to the rotation of the truck assembly. The lower cable section has a copper cable stop attached to one end for installation into a stainless steel winch. This cable stop can easily be removed if the winch is an "M"-type which does not require a cable stop. The upper cable section is supplied with a stainless steel thimble, 2 copper crimps, and two ball cable stops, however, because this section must be threaded through the truck assembly, these parts are not attached to the cable before shipment and must be attached in the field. These standard cable assemblies are designed for flagpoles with a winch installed at 4' above grade.

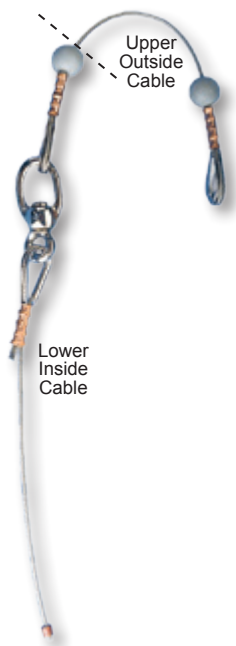

ITEM #	EXPOSED HT. OF FLAGPOLE	LOWER INSIDE CABLE		UPPER OUTSIDE CABLE		1-5	6+	LBS.
		DIA.	LEN.	DIA.	LEN.			
360056	20'	3/32"	20'	1/8"	20'	\$95	\$86	1.4
360332	25*	3/32"	25'	1/8"	25'	105	93	1.6
360057	25'	1/8"	25'	1/8"	25'	105	93	1.9
360333	30*	3/32"	30'	1/8"	30'	111	100	1.9
360058	30'	1/8"	30'	1/8"	30'	111	100	2.2
360334	35*	3/32"	35'	1/8"	35'	119	108	2.1
360059	35'	1/8"	35'	1/8"	35'	119	108	2.5
360060	40'	1/8"	40'	3/16"	40'	129	117	4.2
360061	45'	1/8"	45'	3/16"	45'	135	122	4.6
360062	50'	1/8"	50'	3/16"	50'	148	132	5.1
360063	60'	1/8"	60'	3/16"	60'	183	167	6.1
360064	70'	1/8"	70'	3/16"	70'	196	175	7.0
360065	78'	1/8"	78'	3/16"	78'	202	183	7.8
360066	80'	1/8"	80'	3/16"	80'	209	190	8.0
360067	90'	1/8"	90'	3/16"	90'	264	238	8.9
360068	100'	1/8"	100'	3/16"	100'	282	257	9.9
360069	110'	1/8"	110'	3/16"	110'	293	264	11
360070	120'	1/8"	120'	3/16"	120'	298	269	12
360071	130'	1/8"	130'	3/16"	130'	343	311	13
360072	140'	1/8"	140'	3/16"	140'	355	317	14
360073	150'	1/8"	150'	3/16"	150'	379	343	15
360074	160'	1/8"	160'	3/16"	160'	404	367	16
360075	170'	1/8"	170'	3/16"	170'	428	386	17
360076	180'	1/8"	180'	3/16"	180'	478	428	18
360077	190'	1/8"	190'	3/16"	190'	513	462	19
360078	200'	1/8"	200'	3/16"	200'	563	506	20

*To be used with 5" diameter poles with our M-5 Winch installed. Cable Assemblies can be mixed to achieve higher quantity pricing.