


INTERNAL HALYARD PARTS & ACCESSORIES

DELUXE FLAG ARRANGEMENTS



Arrangement for flag size 6' x 10' or smaller




Shock spring and Safety Cable supplied with arrangements for 8' x 12' or larger flag sizes

Constructed of 1/8" stainless steel aircraft cable with a stainless steel thimble attached at each end with 2 copper crimps. These flag arrangements provide the method of attaching the flag or flags to the cable assembly. This is also an excellent method for changing the quantity of flags or the size(s) of flag(s) without having to change the entire cable assembly. Deluxe flag arrangements are supplied with either 2 or 3 stainless steel quick links depending on the recommended flag size, flag snaps, shock spring where needed and safety cable where needed.

MODEL	ITEM #	FOR FLAG SIZE	SUPPLIED WITH				1-5	6+	LBS.
			QUICK LINKS	FLAG SNAPS	SHOCK SPRING	SAFETY CABLE			
FA2	360474	2' x 3'	2	2 (STAINLESS STEEL SSFS-1)	—	—	\$65	\$59	1.2
FA25	360475	2-1/2' x 4'	2	2 (STAINLESS STEEL SSFS-1)	—	—	73	63	1.3
FA3	360476	3' x 5'	2	2 (STAINLESS STEEL SSFS-1)	—	—	74	65	1.3
FA4	360477	4' x 6'	2	2 (STAINLESS STEEL SSFS-1)	—	—	77	70	1.3
FA5	360478	5' x 8' or 5' x 9-1/2'	2	2 (STAINLESS STEEL SSFS-1)	—	—	81	74	1.4
FA6	360479	6' x 10'	2	2 (STAINLESS STEEL SSFS-1)	—	—	88	81	1.4
FA8	360480	8' x 12'	3	2 (STAINLESS STEEL SSFS-2)	1	1	126	114	2.3
FA10	360481	10' x 15' or 10' x 19'	3	2 (STAINLESS STEEL SSFS-2)	1	1	128	117	2.6
FA12	360482	12' x 18'	3	2 (STAINLESS STEEL SSFS-2)	1	1	136	124	2.6
FA15	360483	15' x 25'	3	2 (STAINLESS STEEL SSFS-2)	1	1	141	128	2.7
FA20	360484	20' x 30' or 20' x 38'	3	2 (STAINLESS STEEL SSFS-2)	1	1	149	133	2.9
FA25	360485	25' x 40'	3	2 (STAINLESS STEEL SSFS-2)	1	1	153	136	3.6
FA30	360486	30' x 50' or 30' x 60'	3	2 (STAINLESS STEEL SSFS-2)	1	1	157	138	4.4

CABLE ASSEMBLIES

Constructed of 1/8" and/or 3/16" stainless steel aircraft cable incorporating a stainless steel swivel to minimize the effect of unraveling due to the rotation of the truck assembly. The upper cable section is supplied with a stainless steel thimble, 2 copper crimps, and two ball cable stops, however, because this section must be threaded through the truck assembly, these parts are not attached to the cable before shipment and must be attached in the field. These standard cable assemblies are designed for flagpoles with a winch installed at 4' above grade.

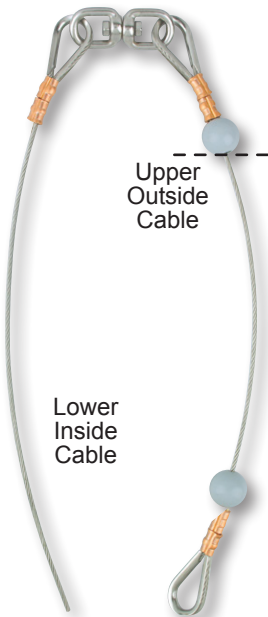

ITEM #	EXPOSED HT. OF FLAGPOLE	LOWER INSIDE CABLE		UPPER OUTSIDE CABLE		1-5	6+	LBS.
		DIA.	LEN.	DIA.	LEN.			
360056	20'	3/32"	17'	1/8"	17'	\$101	\$92	1.4
360332	25**	3/32"	21'	1/8"	21'	114	99	1.6
360057	25'	1/8"	21'	1/8"	21'	114	99	1.9
360333	30**	3/32"	27'	1/8"	27'	120	108	1.9
360058	30'	1/8"	27'	1/8"	27'	120	108	2.2
360334	35**	3/32"	31-1/2'	1/8"	31-1/2'	128	117	2.1
360059	35'	1/8"	31-1/2'	1/8"	31-1/2'	128	117	2.5
360060	40'	1/8"	37'	3/16"	37'	139	127	4.2
360061	45'	1/8"	42'	3/16"	42-1/2'	146	132	4.6
360062	50'	1/8"	46'	3/16"	46-1/2'	160	142	5.1
360063	60'	1/8"	56-1/2'	3/16"	57'	198	180	6.1
360064	70'	1/8"	66-1/2'	3/16"	67'	212	189	7.0
360065	78'	1/8"	74-1/2'	3/16"	75'	218	198	7.8
360066	80'	1/8"	76-1/2'	3/16"	77'	225	206	8.0
360067	90'	1/8"	86-1/2'	3/16"	87'	286	257	8.9
360068	100'	1/8"	96-1/2'	3/16"	97'	304	279	9.9
360069	110'	1/8"	106-1/2'	3/16"	107'	318	286	11
360070	120'	1/8"	116-1/2'	3/16"	117'	323	291	12
360071	130'	1/8"	126-1/2'	3/16"	127'	371	336	13
360072	140'	1/8"	136-1/2'	3/16"	137'	384	343	14
360073	150'	1/8"	146-1/2'	3/16"	147'	410	371	15
360074	160'	1/8"	156-1/2'	3/16"	157'	437	397	16
360075	170'	1/8"	166-1/2'	3/16"	167'	463	418	17
360076	180'	1/8"	176-1/2'	3/16"	177'	517	463	18
360077	190'	1/8"	186-1/2'	3/16"	187'	555	500	19
360078	200'	1/8"	196-1/2'	3/16"	197'	610	547	20

*To be used with 5" diameter poles with our M-5 Winch installed. Cable Assemblies can be mixed to achieve higher quantity pricing.