
GALVANIZED STEEL FOUNDATION SLEEVES

The most common type of flagpole installation is the in-ground foundation sleeve method which calls for 1' of the flagpole to be encased in the ground sleeve for each 10' of exposed flagpole height. The diameter of the sleeve should be at least 2" greater than the outside diameter of the flagpole with the area between the flagpole and the sleeve filled with dry sand. Sleeves with a 6" diameter are supplied with a base plate and grounding spike. Sleeves with a diameter of greater than 6" are supplied with a base plate, support plate, grounding spike and, for ease of vertical alignment, steel centering wedges welded to the inside of the base plate. If you require other sizes than listed or have special on-site conditions please consult the factory.

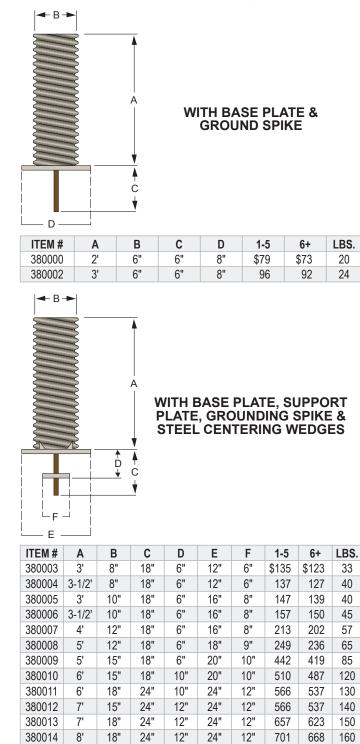

PVC SLEEVES

Poles slip into form fit sleeves snugly - no voids to fill with sand. Standard sleeves require wood wedges & sand for a proper installation.


				-		
		_				
		1				
	FOR POLE					
ITEM #	DIA.	LEN.	TYPE	1-5	6+	LBS.
380015	1-3/8"	12"	FORM FIT	\$6.30	\$5.70	.14
380016	1-5/8"	15"	FORM FIT	7.40	6.70	.20
380017	1-3/4"	20"	FORM FIT	8.80	7.90	.26
380018	2"	15"	FORM FIT	11.30	10.00	.25
380020	2"	20"	FORM FIT	12.40	11.30	.34
380021	2-1/2"	30"	FORM FIT	16.50	15.50	1.1
380022	3"	20"	FORM FIT	20.20	19.20	.95
380023	3"-31/2"	24"	STANDARD	17.80	17.00	1.6
380024	3"-31/2"	30"	STANDARD	24.60	23.60	1.9

SLEEVES FOR FIBERGLASS FLAGPOLES



ITEM #	LENGTH	DIAMETER	1-5	6+	LBS.
380025	18"	6.3"	\$32	\$30	1.1
380026	24"	5"	44	41	1.4
380194	30"	6.3"	46	43	2.2
380195	30"	9-1/4"	93	83	4.0
380027	36"	8"	93	83	4.4
380029	48"	8"	117	105	6.2
380030	60"	14"	336	304	18
380031	72"	14"	430	386	27
380032	84"	21"	935	873	34

GALVANIZED STEEL ANCHOR BOLTS



Complete with 2 hex nuts, 1 Washer & 1 Lock Washer $_{ m B}$ $-$									
ITEM #	Α	В	С	D	1-5	6+	LBS.		
380037	16"	5/8"	3-1/2"	4"	\$23	\$21	2.2		
380038	24"	3/4"	4"	5"	24	22	3.3		
380039	36"	1"	4"	6"	39	37	8.1		
380040	40"	1"	4"	6"	47	45	8.9		
380041	54"	1-1/4"	6"	8"	118	108	29		

COPPER CLAD LIGHTNING KIT

Each kit contains 5' long by 1/2" diameter copper clad rod, one 3' long by 1/2" diameter copper wire plus one connecting bracket.



COMPLETE SET						5' x 1/2" ROD ONLY					
	ITEM #	1-5	6+	LBS.		ITEM #	PRICE \$61		LBS.		
	380033	\$111	\$100	4.5		380035					
	WIRE ONLY					BRACKET ONLY					
	ITEM #	PER	FOOT	LBS.		ITEM #	1-5	6+	LBS.		
	380034	\$8	.50	.36		380036	\$34	\$31	.36		